


**art.DXO/B**

**FIXED SUPPORTS mod.10/40** in anodized aluminium alloy with axial/radial bearings and accessories.



**Assembled DXO/B support.**

**DXO/B Support - exploded diagram.**

Standard fitting on the machine with or without Supports Base.

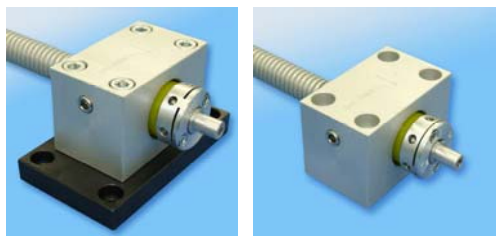




Fitting below machine with or without Supports Base.

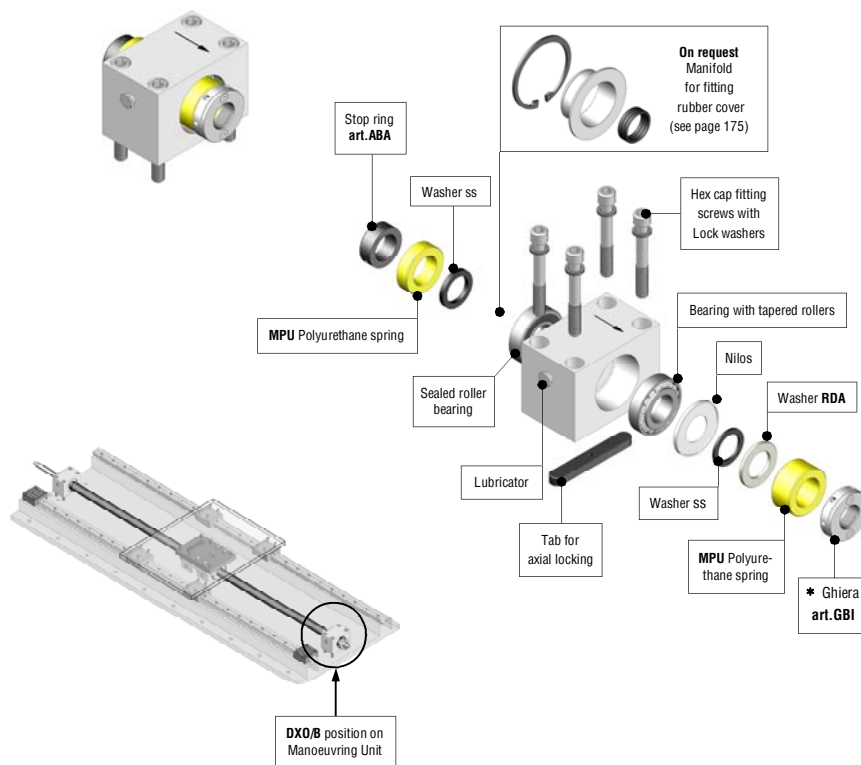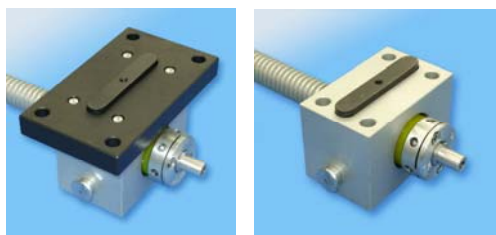

— **Support DXO/B** ready for fitting to the machine. Available if necessary, as shown in the two photos, with **Supports Base art.BD LXR** (please see page 144), and request they can be made in aluminium alloy.

\* Alternatively, for particular technical requirements for manual/horizontal movements, the DXO/B support is available with **self-locking ring GHA** (please see page 51).

— Complete diagrams showing how to fit to the machine are on pages 158 -161.

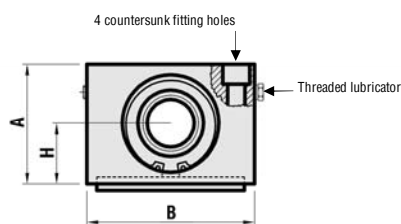

— **C** = Nett size of the support excluding accessories and possible Manifold for protective cover.

— Approximate weight with accessories and fitting bolts, excluding Supports Base BD LXR.

| MODELS        | CODE         | ARTICLE        | A  | B   | C  | H    | Ø Internal of bearings | F3 | F4 | Hex. Cap screws for fitting | Slot required for fitting | Threaded Lubricator | WEIGHT Kg |
|---------------|--------------|----------------|----|-----|----|------|------------------------|----|----|-----------------------------|---------------------------|---------------------|-----------|
| mod. 10       | 301SF410     | DXO/B 10       | 34 | 55  | 30 | 17,5 | 10 (6)                 | 40 | 17 | M6x40                       | Ø5x42x3                   | M6x1                | 0,270     |
| mod. 12       | 301SF412     | DXO/B 12       | 39 | 60  | 30 | 20   | 10 (8)                 | 45 | 17 | M6x45                       | Ø6x47x3                   | M6x1                | 0,300     |
| mod. 14       | 301SF414     | DXO/B 14       | 44 | 65  | 35 | 22,5 | 12 (8)                 | 50 | 20 | M8x50                       | Ø8x52x3,5                 | M6x1                | 0,440     |
| mod. 16       | 301SF416     | DXO/B 16       | 49 | 70  | 40 | 25   | 10                     | 54 | 24 | M8x55                       | Ø10x62x4                  | 1/8G                | 0,600     |
| mod. 18       | 301SF418     | DXO/B 18       | 49 | 75  | 45 | 25   | 12                     | 55 | 27 | M8x55                       | Ø10x62x4                  | 1/8G                | 0,680     |
| mod. 20 22    | 301SF42022   | DXO/B 20 22    | 54 | 80  | 50 | 27,5 | 15                     | 60 | 32 | M8x60                       | Ø12x72x4                  | 1/8G                | 0,830     |
| mod. 24 25 26 | 301SF4242526 | DXO/B 24 25 26 | 64 | 95  | 55 | 32,5 | 17                     | 75 | 35 | M10x75                      | Ø14x82x4,5                | 1/8G                | 1,270     |
| mod. 28 30 32 | 301SF4283032 | DXO/B 28 30 32 | 69 | 100 | 60 | 35   | 20                     | 80 | 40 | M10x80                      | Ø14x92x4,5                | 1/8G                | 1,521     |
| mod. 35 36    | 301SF43536   | DXO/B 35 36    | 79 | 110 | 70 | 40   | 25                     | 90 | 50 | M10x90                      | Ø14x102x4,5               | 1/8G                | 2,150     |
| mod. 40       | 301SF440     | DXO/B 40       | 84 | 120 | 75 | 42,5 | 30                     | 95 | 50 | M12x100                     | Ø16x112x5                 | 1/8G                | 2,540     |

— The supports above are shown assembled in the **Excellent light** Groups (see preceding pages) for which it is possible to calculate the total weight by adding them to the weight of the TR screw using the table on page 165.

— To comply with safety regulations it is obligatory to use the locking tabs, the fitting hardware supplied, and ensuring that the arrows engraved in the supports are all facing in the same direction, which for vertical/oblique movements must be facing downwards.