


art.DXC

FIXED SUPPORTS FOR SCREWS “BID” Dx / Sx mod.20 / 60 in nitrided steel, with bronze flange bush and accessories.



Support DXC assembled.

DXC Support - exploded diagram.

Standard fitting on the machine with and without Supports Base.



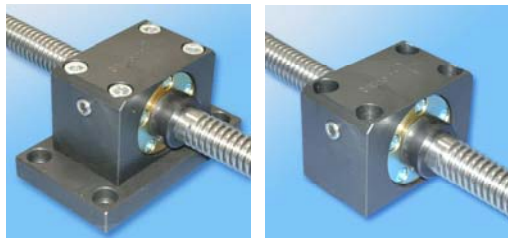


Fitting below machine with and without Supports Base.

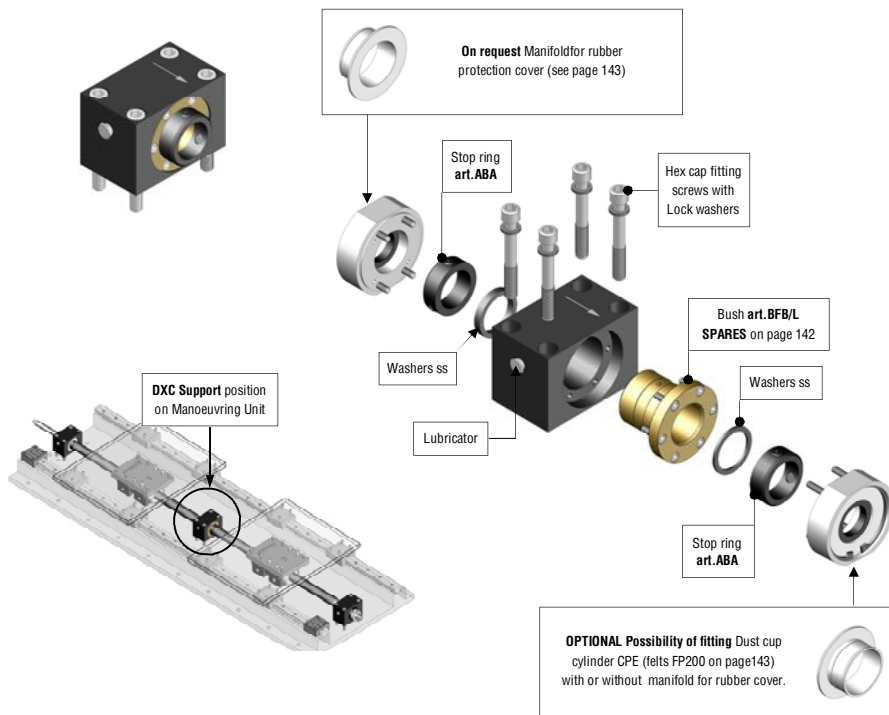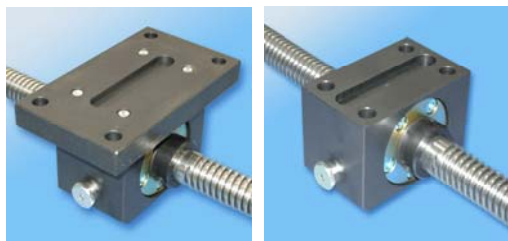

— **DXC Support** ready for fitting to the machine. Available as necessary, as in the two photos, with **Supports Base art.BD LXR** (please see page 144).

— Complete diagrams showing how to fit to the machine are on pages 160 and 161.

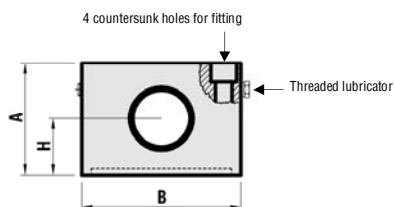

— **D1** Nett size with Dust Cups, excluding Manifolds for covers

— **Approximate weight with accessories, fitting bolts and Supports Base BD LXR.**

MODEL BY SCREW	CODE	ARTICLE	A	B	C	D1	H	Ø internal of Bush	F3	F4	Hex screws for fitting	Threaded Lubricator	WEIGHT Kg
TR 20x4	301SF220	DXC 20	54	80	50	92	27,5	20	60	32	M8x60	1/8G	1,460
TR 22x5	301SF222	DXC 22	54	80	50	92	27,5	22	60	32	M8x60	1/8G	1,460
TR 24x5	301SF224	DXC 24	64	95	55	105	32,5	24	75	35	M10x75	1/8G	2,260
TR 25x5	301SF225	DXC 25	64	95	55	105	32,5	25	75	35	M10x75	1/8G	2,260
TR 26x5	301SF226	DXC 26	64	95	55	105	32,5	26	75	35	M10x75	1/8G	2,260
TR 28x5	301SF228	DXC 28	69	100	60	112	35	28	80	40	M10x80	1/8G	2,750
TR 30x6	301SF230	DXC 30	69	100	60	112	35	30	80	40	M10x80	1/8G	2,750
TR 32x6	301SF232	DXC 32	69	100	60	112	35	32	80	40	M10x80	1/8G	2,750
TR 35x6	301SF235	DXC 35	79	110	70	122	40	35	90	50	M10x90	1/8G	4,000
TR 36x6	301SF236	DXC 36	79	110	70	122	40	36	90	50	M10x90	1/8G	4,000
TR 40x7	301SF240	DXC 40	84	120	75	127	42,5	40	95	50	M12x100	1/8G	4,980
TR 45x8	301SF245	DXC 45	89	125	90	152	45	45	100	65	M12x100	1/8G	6,480
TR 46x8	301SF246	DXC 46	89	125	90	152	45	46	100	65	M12x100	1/8G	6,480
TR 50x8	301SF250	DXC 50	99	130	90	152	50	50	105	65	M12x110	1/8G	7,500
TR 55x9	301SF255	DXC 55	109	150	109	181	55	55	122	80	M14x120	1/8G	11,620
TR 60x9	301SF260	DXC 60	109	150	109	189	55	60	122	80	M14x120	1/8G	11,240

— The supports above are shown assembled in the **Excellent Bidirectional** Groups (see preceding pages) for which it is possible to calculate the total weight by adding them to the weight of the TR screw using the table on page 127

— The **DXA**, **DXB** and **DXC** supports have the same external dimensions, milling and fitting holes.

Photos, diagrams and technical data are the exclusive property of Bimeccanica srl. All rights reserved.